



...ENJOY the DISPLAY EXPERIENCE

LED SCREEN **...the clever Generation**

*...bring the LED Display in
every home!*

LIVING WINDOW



... the DISPLAY for Everybody.
Everywhere.

We Have a VISION:

1. make Installation Simple
2. reduce the Weight
3. bring the Costs down


Compare LED DISPLAY		
IRON Cabinet	DICAST ALUMINIUM CABINET	Clever GENERATION
50Kg/qm	30Kg/qm	15Kg/qm
100Liter Volumen shipping/qm	60Liter Volumen/qm	39 Liter Volumen/qm
3 men for installation	2 men	1 men
ENGINEER and Worker	Engineer for setup	No Engineer need-
No MANUAL	NO manual	STEP by STEP-Manual

Cabinet-Replacement is a self-made-Construction made from DRY-Wall





CD-Profile

60/27, 3 und 4 m lang,
Großbund 150 Stck.
nach DIN 18.182 EN, 14.195
Verpackungseinheit 10 Stck.



Typ	A mm	B mm	C mm
C 60/27	60	27	27

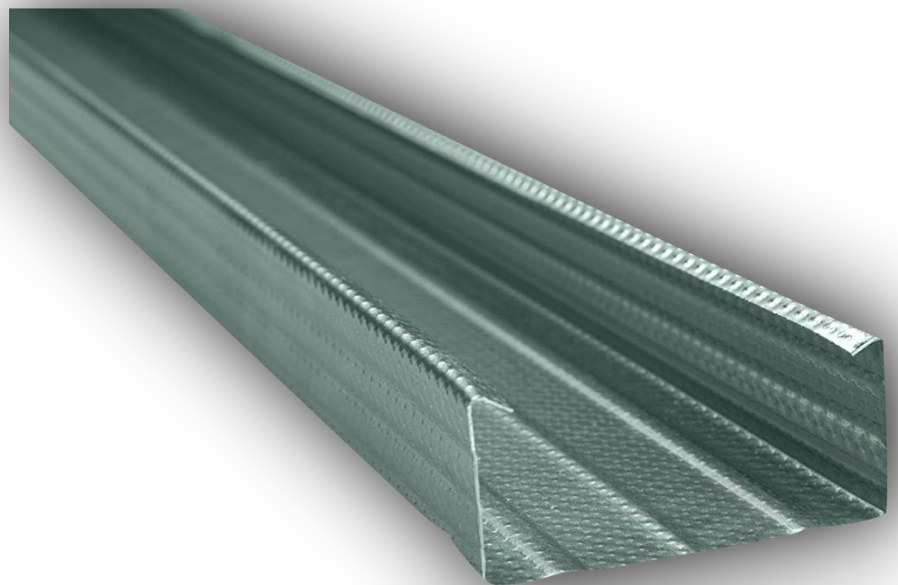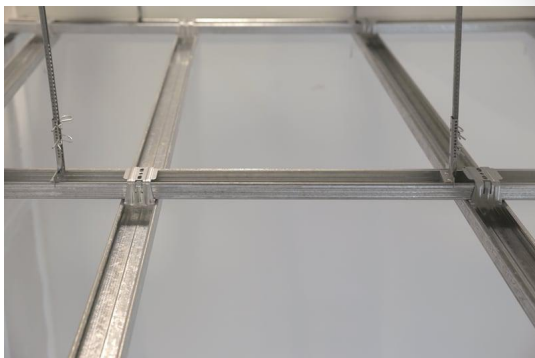

Its LOCAL to buy WORLDWIDE

We provide for EVERY Project a Drawing for the correct Installation

JDX GERMANY , Andernacher Straße 31 c, 90411 Nürnberg


JDX CHINA , Longgang Road, Longgang, 518116 Shenzhen, Jindaxiang Technology Co., Ltd.

we INSTALL on MODULES N52 NEODYM MAGNETS

4_{Kg}HOLDING POWER
Per Piece**Formel für Flussdichte Zylindermagnet**

Formel für das B-Feld auf der Symmetrieachse eines axial magnetisierten Zylindermagneten (Scheibe oder Stab):

$$B = \frac{B_r}{2} \left(\frac{D+z}{\sqrt{R^2 + (D+z)^2}} - \frac{z}{\sqrt{R^2 + z^2}} \right)$$

 B_r : Remanenzfeld, unabhängig von der Geometrie des Magneten (siehe Physikalische Magnet-Daten)

z: Abstand auf der Symmetrieachse von einer Polfläche

D: Dicke (bzw. Höhe) des Zylinders


R: Halber Durchmesser (Radius) des Zylinders

Die Längeneinheit ist beliebig wählbar, solange sie für alle Längen gleich ist.

Formel für Flussdichte Ringmagnet

Formel für das B-Feld auf der Symmetrieachse eines axial magnetisierten Ringmagneten:

$$B = \frac{B_r}{2} \left[\frac{D+z}{\sqrt{R_o^2 + (D+z)^2}} - \frac{z}{\sqrt{R_o^2 + z^2}} - \left(\frac{D+z}{\sqrt{R_i^2 + (D+z)^2}} - \frac{z}{\sqrt{R_i^2 + z^2}} \right) \right]$$


 B_r : Remanenzfeld, unabhängig von der Geometrie des Magneten (siehe Physikalische Magnet-Daten)

z: Abstand auf der Symmetrieachse von einer Polfläche

D: Dicke (bzw. Höhe) des Rings



 R_o : Außenradius des Rings R_i : Innenradius des Rings

Die Längeneinheit ist beliebig wählbar, solange sie für alle Längen gleich ist.

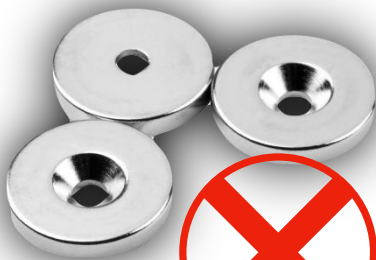
Die Formel für Ringmagnete zeigt, dass sich das B-Feld für einen Ringmagneten zusammensetzt aus dem Feld eines größeren Zylindermagneten mit Radius R_o minus des Feldes eines kleineren Zylindermagneten mit Radius R_i .1_{Kg}HOLDING POWER
Per Piece

MODUL-CONNECTION

with PATENT-CNC element.

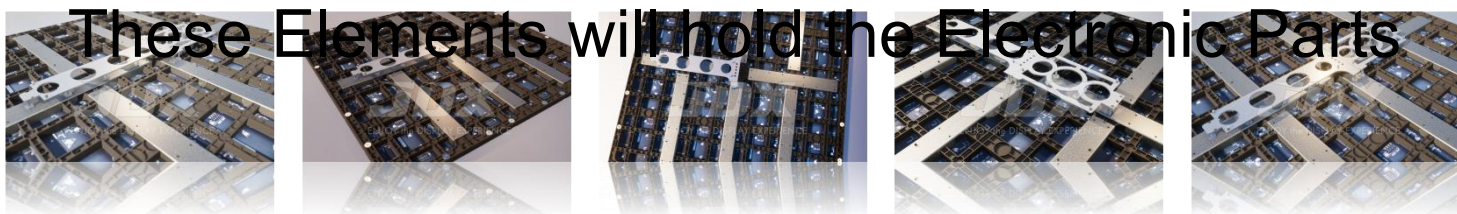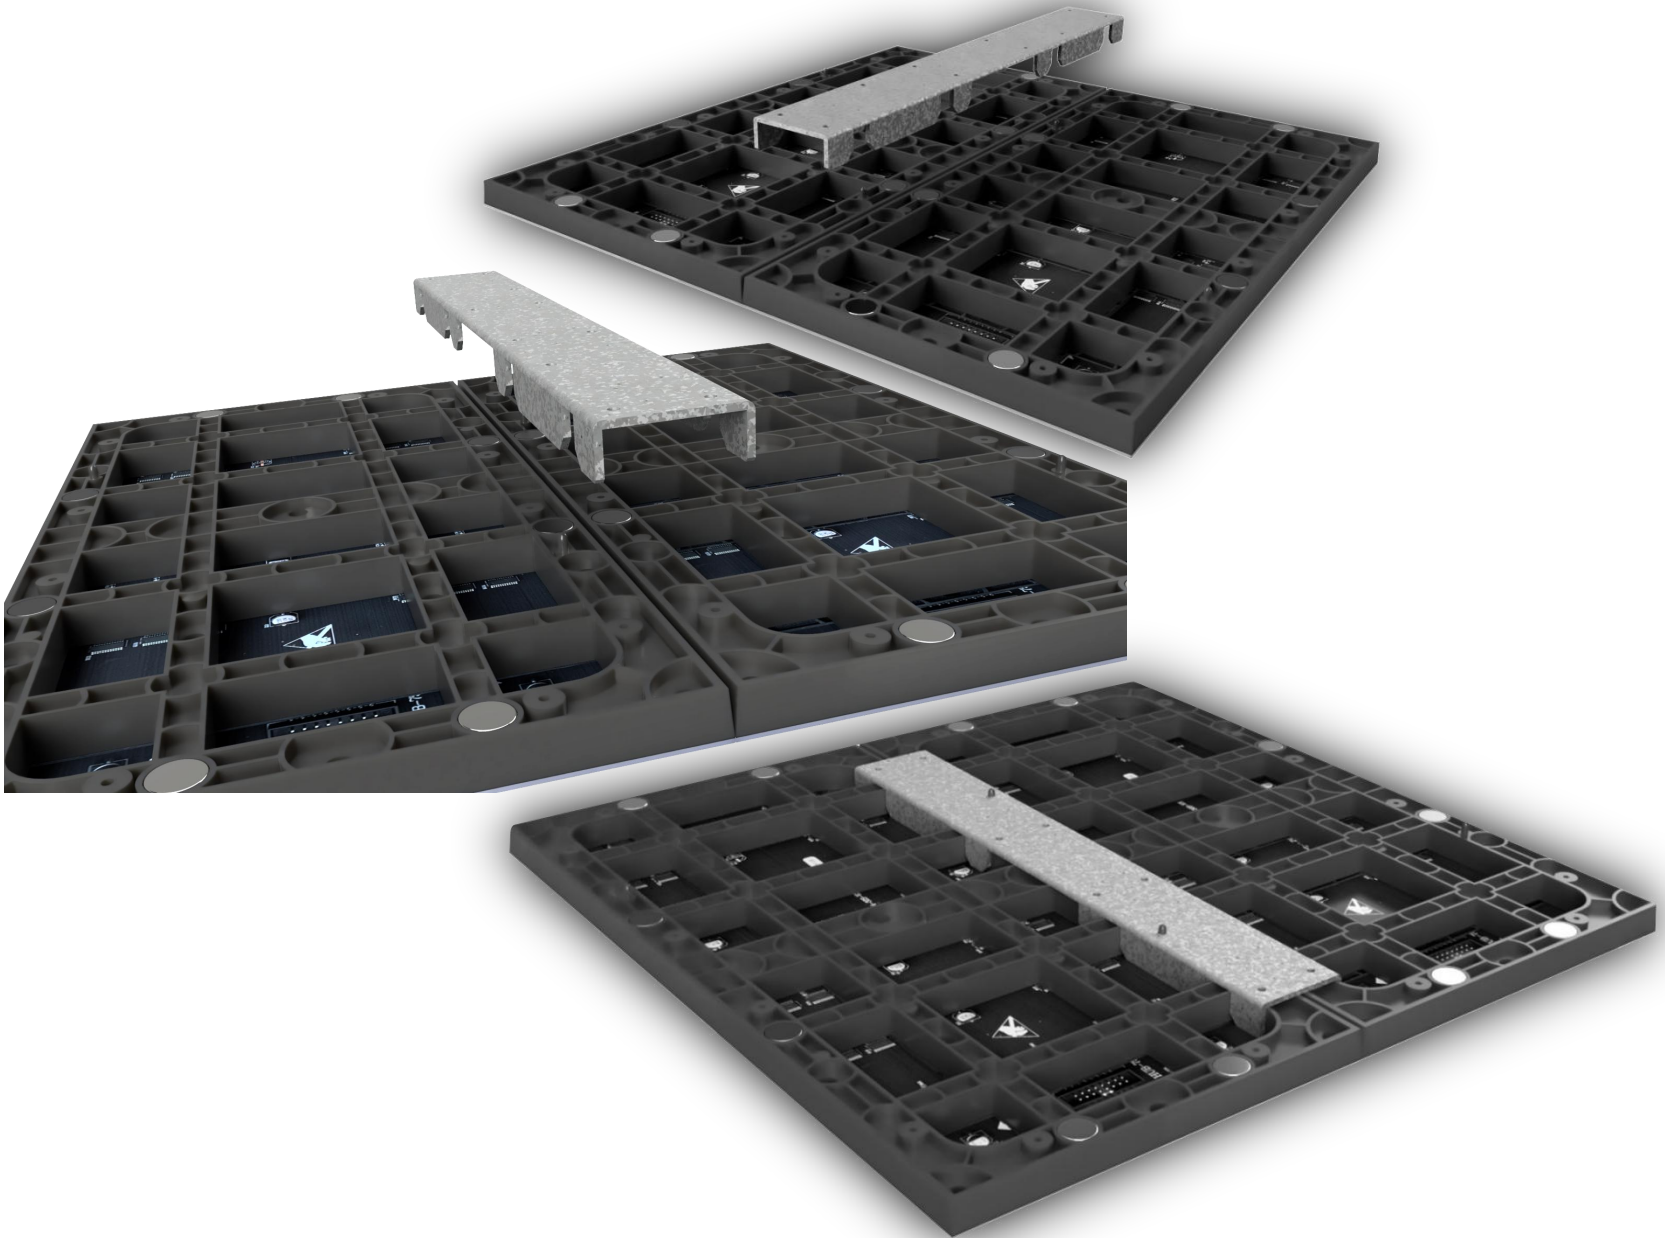

Tool-less Installation of the Electronic components

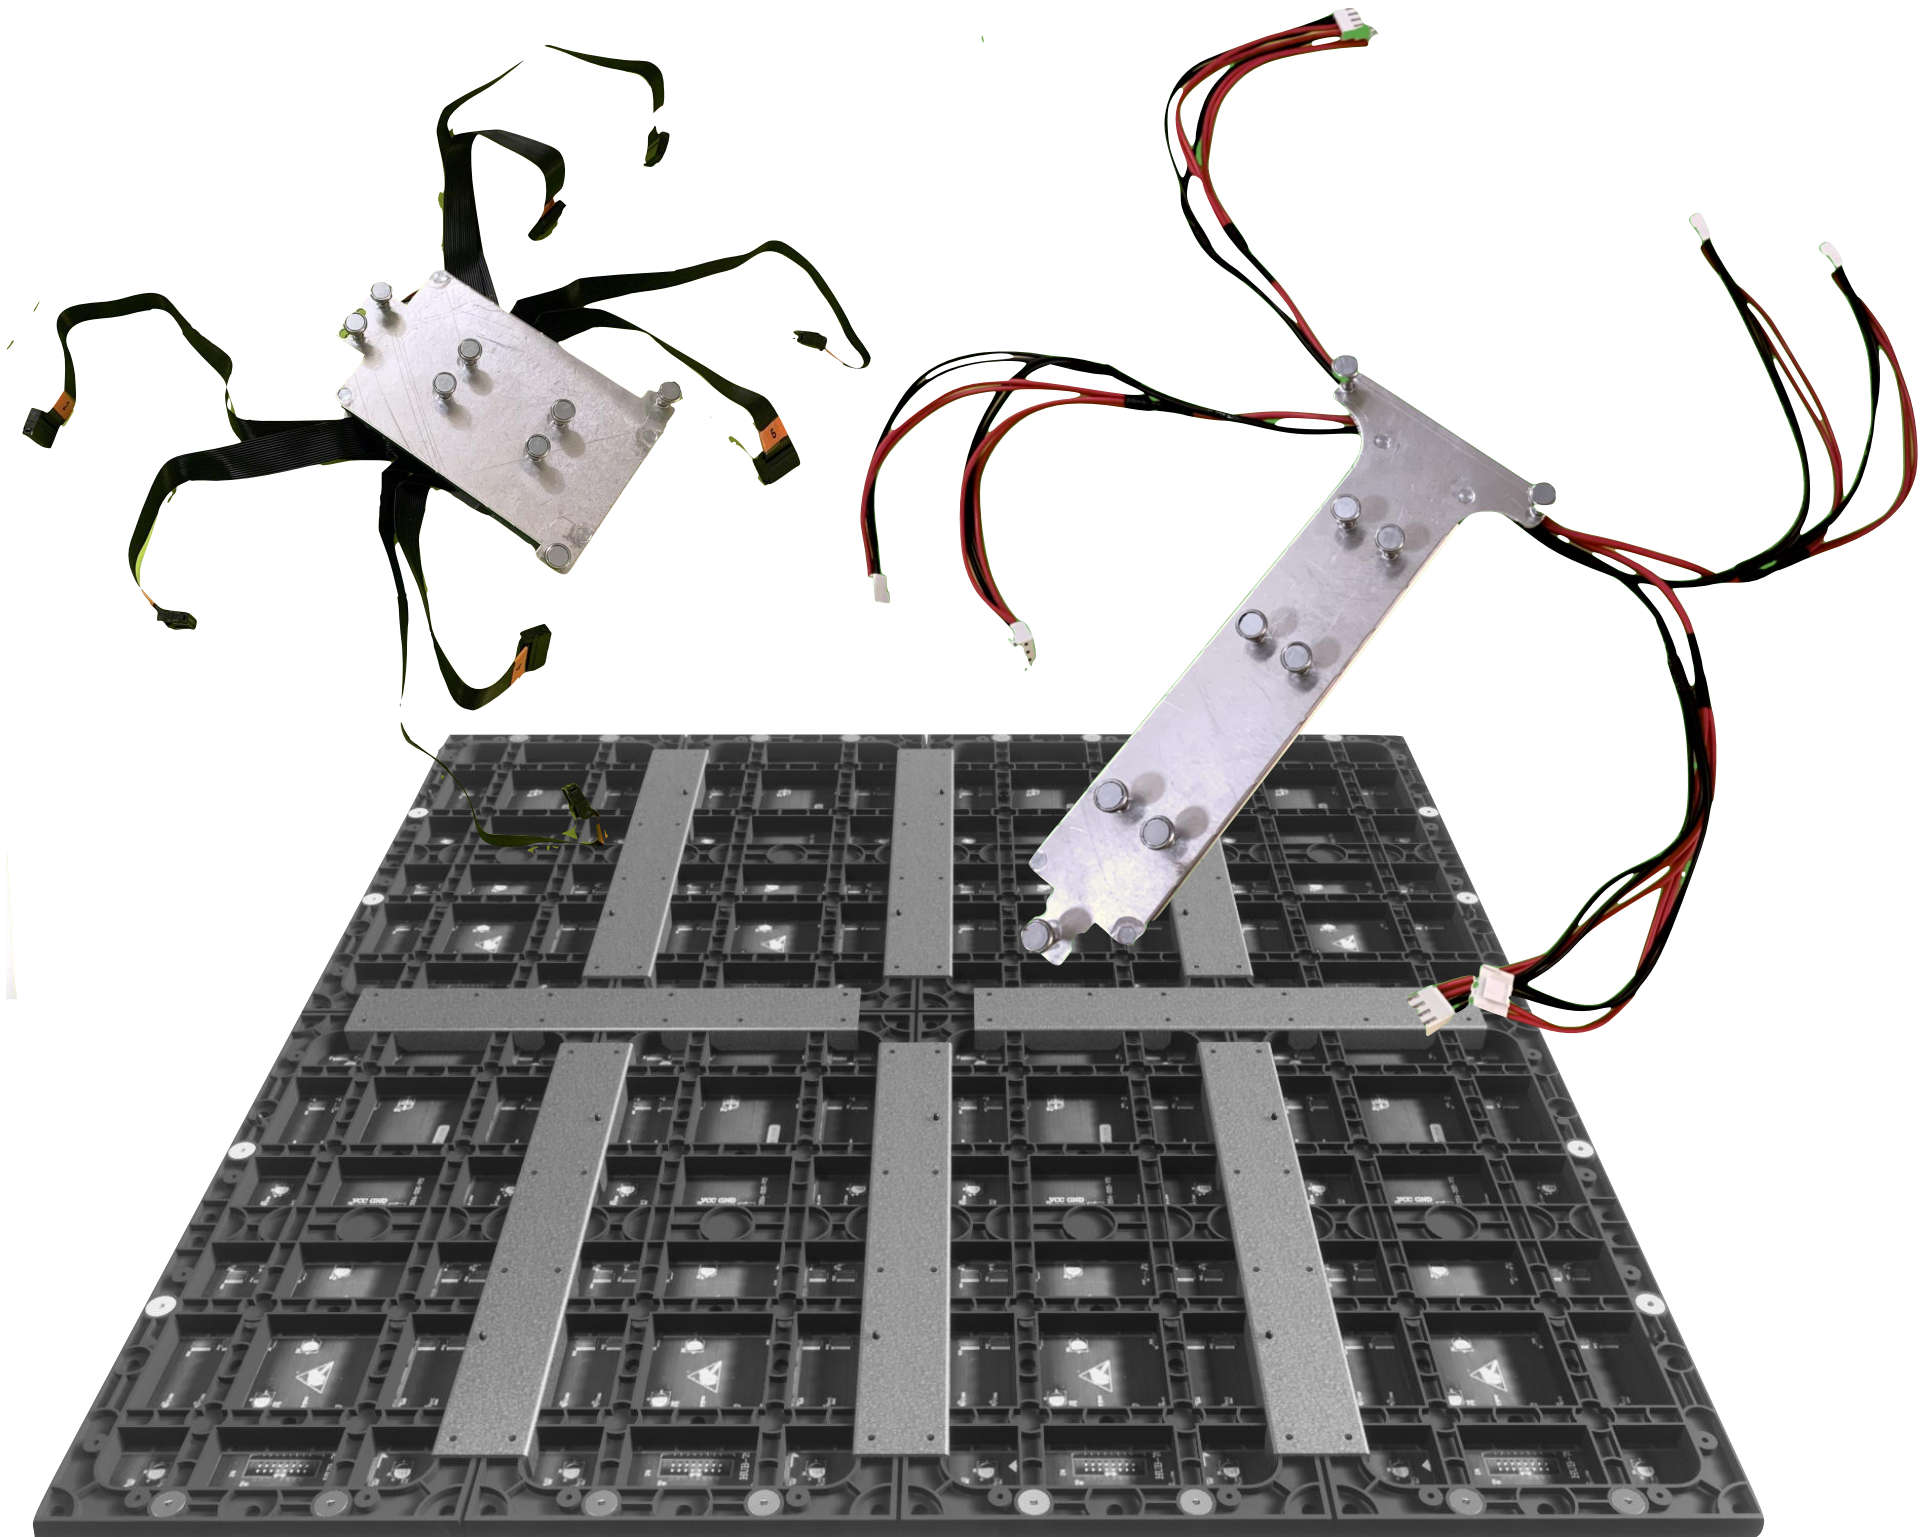


LED SCREEN ...the clever Generation


PRE-programmed SIGNAL-CARD



...ENJOY the DISPLAY EXPERIENCE

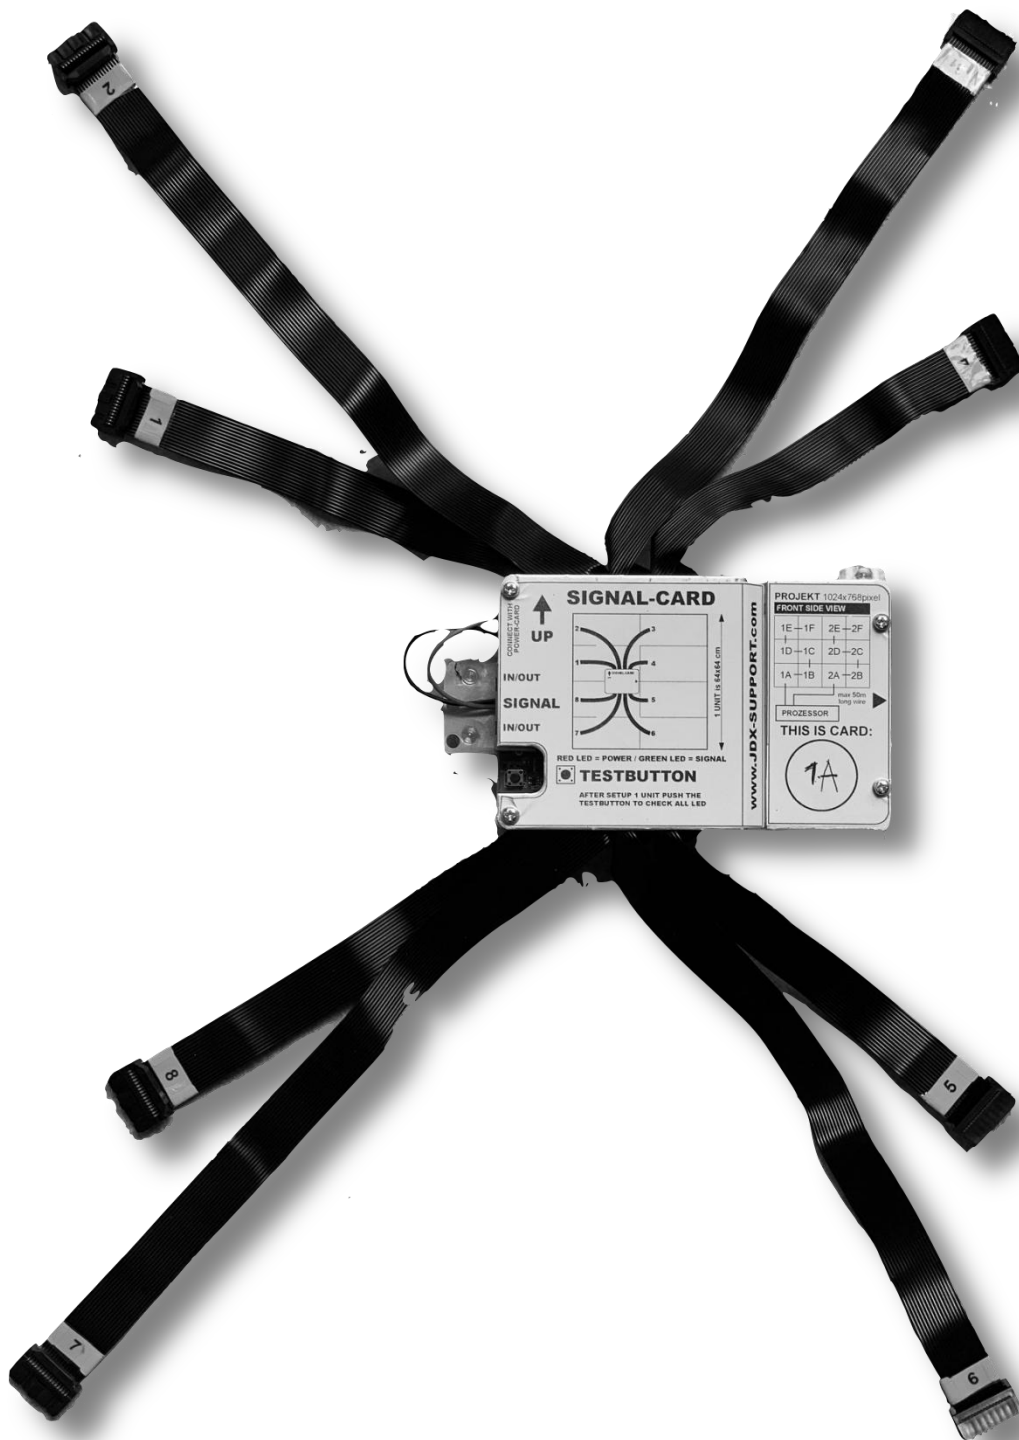

EVERY CARD
Have the correct
Settings and a
Number to place
In the Projekt

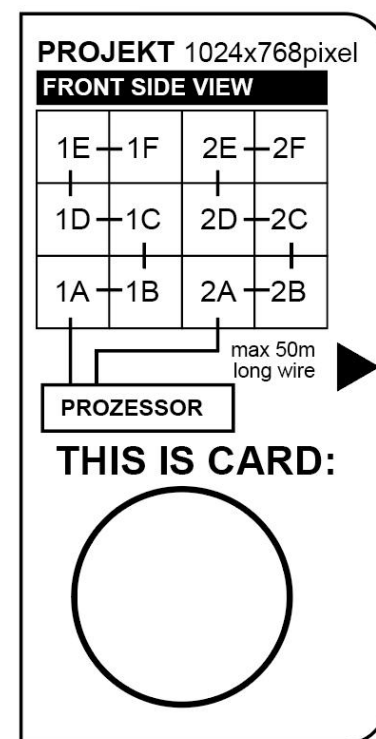

PRE-PAIRED POWER-CARD

Reduce the failure and minimize the work

Quick and SAVETY!



...ENJOY the DISPLAY EXPERIENCE

Goldpower 金威源 开关电源
SWITCHING POWER SUPPLY

型号 (MODEL): GPAD201M5-1B
输入 (INPUT): 100—240V~, 50/60Hz; 2.5A Max.
输出 (OUTPUT): +4.5V $\pm$ 5%; 0-40A

UL E255641

深圳市金威源科技股份有限公司
Shenzhen Gold Power Tech Co., Ltd.
Address: Floor 1-3 Bldg A, Floor 1-5 Bldg B2, Gold
Power Industry Park, Julongshan, Grand Industrial
Zone, Pingshan New District, Shenzhen 518118

中国制造
Made in China


5V

	
Zertifikat Certificate	
Zertifikat Nr. / Certificate No. R 504438115	Blatt / Sheet 0001
Ihre Zeichen / Client Reference P. W.	Unser Zeichen / Our Reference G2-ZENPFA-50287307 001
	Anstellungsdatum / Date of Issue 15.10.2019 <i>(day/mo/yr)</i>
Gemeinschaftsinhaber / License Holder Shenzhen Gold Power Tech Co., Ltd. Floor 1-3 Bldg A, Floor 1-5 Bldg B2, Gold Power Industry Park Jilongshan, Grand Industrial Zone Pingshan New District, Shenzhen P. R. China	Fertigungsstätte / Manufacturing Plant Shenzhen Gold Power Tech Co., Ltd. Floor 1-3 Bldg A, Floor 1-5 Bldg B2, Gold Power Industry Park Jilongshan, Grand Industrial Zone Pingshan New District, Shenzhen P. R. China
Prüfzeichen / Test Mark 	Gefährdung / Tested acc. to EN 62368-1:2014+A11
Zertifiziertes Produkt / (Certificate/Definition) Product Identification	Lizenzentgelt - Einheit License Fee - Unit
Power Supply (SWITCHING POWER SUPPLY)	
Type Designation : 1) GPAD401M4-2-IH, GPAD401M5-1H, GPAD401M5-1H2, GPAD401M4-2-IH2, GPAD401M5-1H2, 2) GPAD401M4-2-IH2, GPAD401M5-1H2, GPAD401M5-5-IH2, GPAD401M4-2-IH2, GPAD401M5-1H2, GPAD401M5-5-IH2 (Goldpower) Input : 1) AC 100-240V; 50/60Hz; 6A MAX. 2) AC 195-240V; 50/60Hz; 3A MAX. Output : Refer to Appendix 1 Max. Ambient Temperature : 55°C Max. operation altitude : 5000 m	12
Remark: The installation has to be carried out according to the installation instructions accompanying the product.	
12	
ANLAGE (Appendix) : 1	
Dem Zertifikat liegt unsere Prüf- und Zertifikationsanordnung zugrunde und es bestätigt die Konformität des Produktes mit den oben genannten Standards und Prüfverfahren. Zusätzliche Anforderungen in Ländern, in denen das Produkt in Verkehr gebracht werden soll, müssen zusätzlich beachtet werden. Die Herstellung des zertifizierten Produktes wird überwacht. This certificate is based on our Testing and Certification Regulation and states the conformity of the product with the standard and testing requirements as indicated above. Any additional requirements in countries where the product is going to be marketed have to be considered additionally. The manufacturing of the certified product is subjected to surveillance.	
TUV Rheinland LGA Products GmbH, Hiltlstraße 2, 90461 Nürnberg Tel: +49 221 808-111 e-mail: info-nt@tuv-rheinland.net Fax: +49 221 808-393 http://www.tuv-rheinland.net	




10

Processor with pre-programmed Setup **READY to USE**

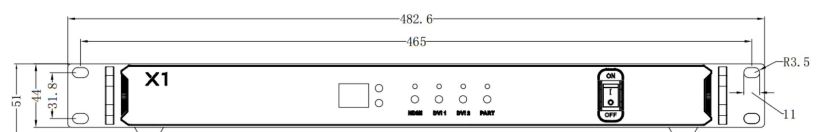

Rear view (unit: mm)



Top view (unit: mm)

X1



HDMI

DVI



PC/GAME




TV/CINEMA



VIDEO-CONFERENCE

THE MANUAL - STEP by STEP INSTRUCTIONS

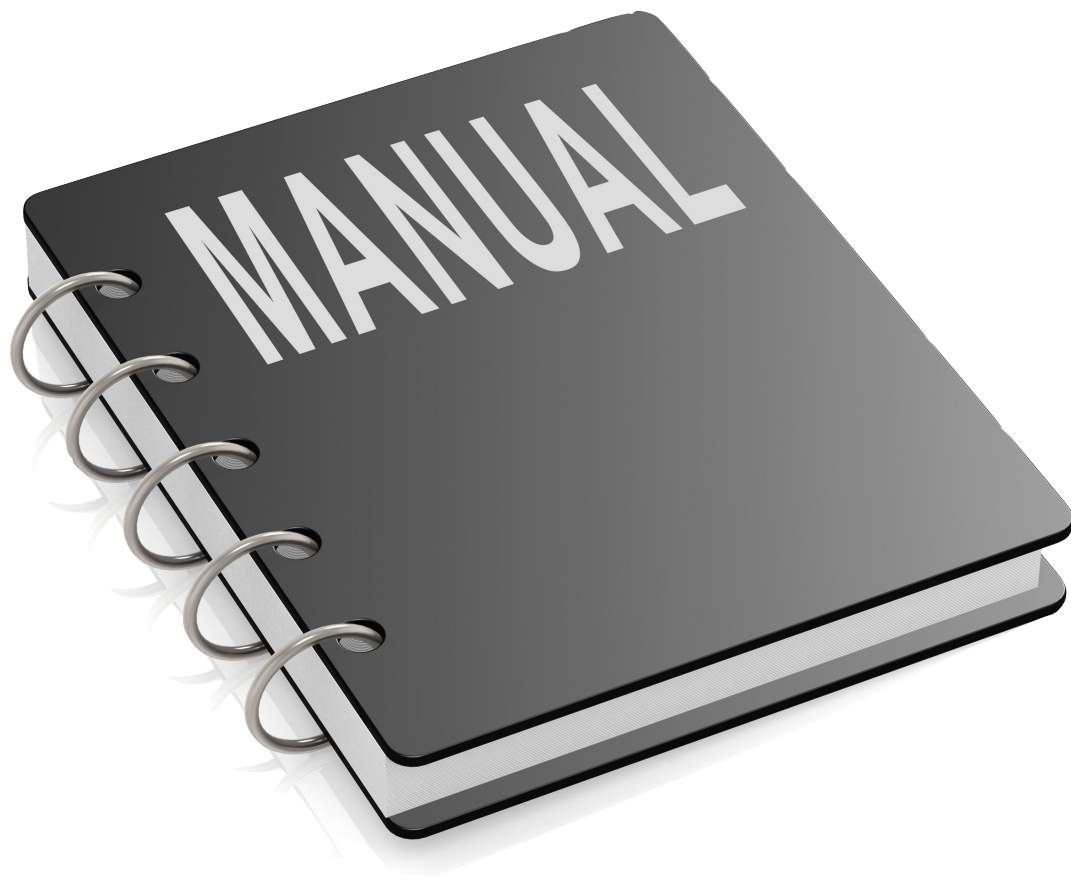

Step1


Step2

Step3

Step4

ALL IN ONE CARTON BOX

20 x 20 x 40 cm



NO PLASTIC BAG!


Avoid the Plastic-Packing, we need to save our Planet!

EAZY-ECCO

(I-PAD FORMAT)

STANDARD SCREEN SIZE

with= 4 UNITS

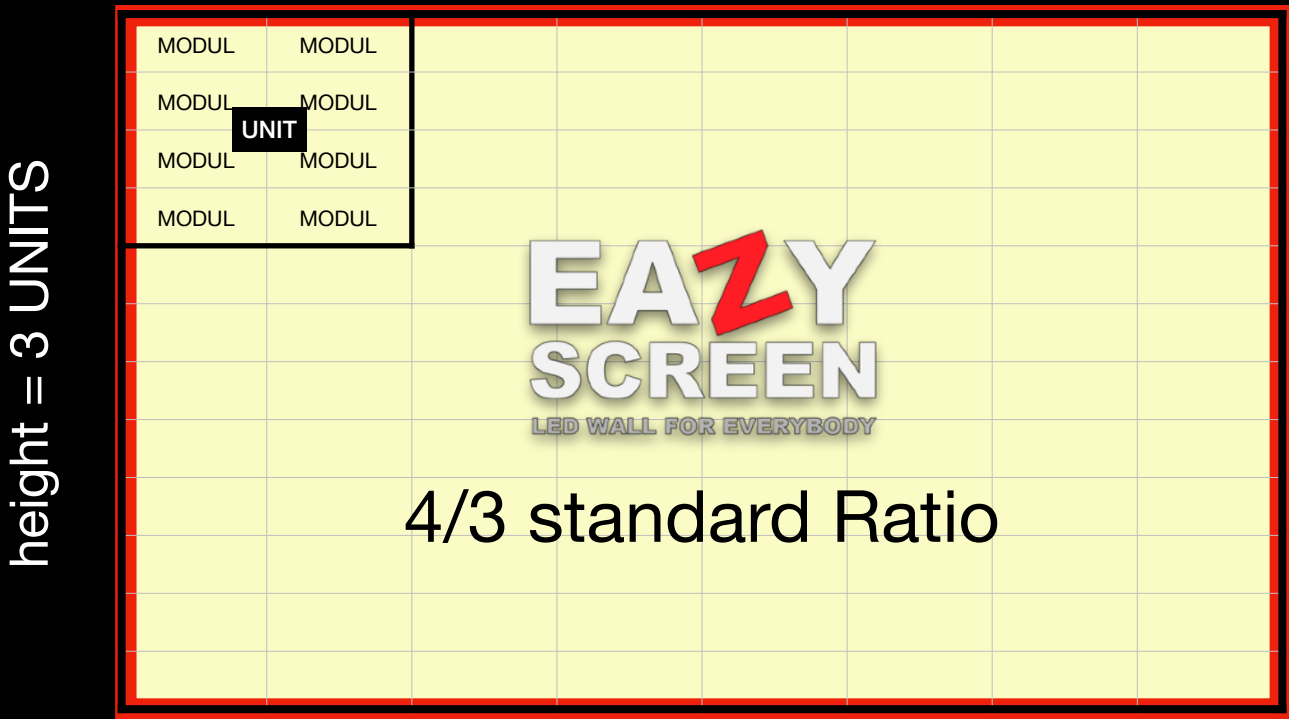

12+1 Boxes = 85 kg in total, 200l Shipping-Volume, 4modules Spare for FREE!

PIXEL-RESOLUTION


	4/3 RATIO
P 2.5	1024 x 768
P 2	1280 x 960
P1.8	1408 x 1056

...for more Questions? ask your local EAZY-DEALER!

WIDE SCREEN SIZE

with= 12 modules / 6 UNITS

height= 12 modules / 3 UNITS

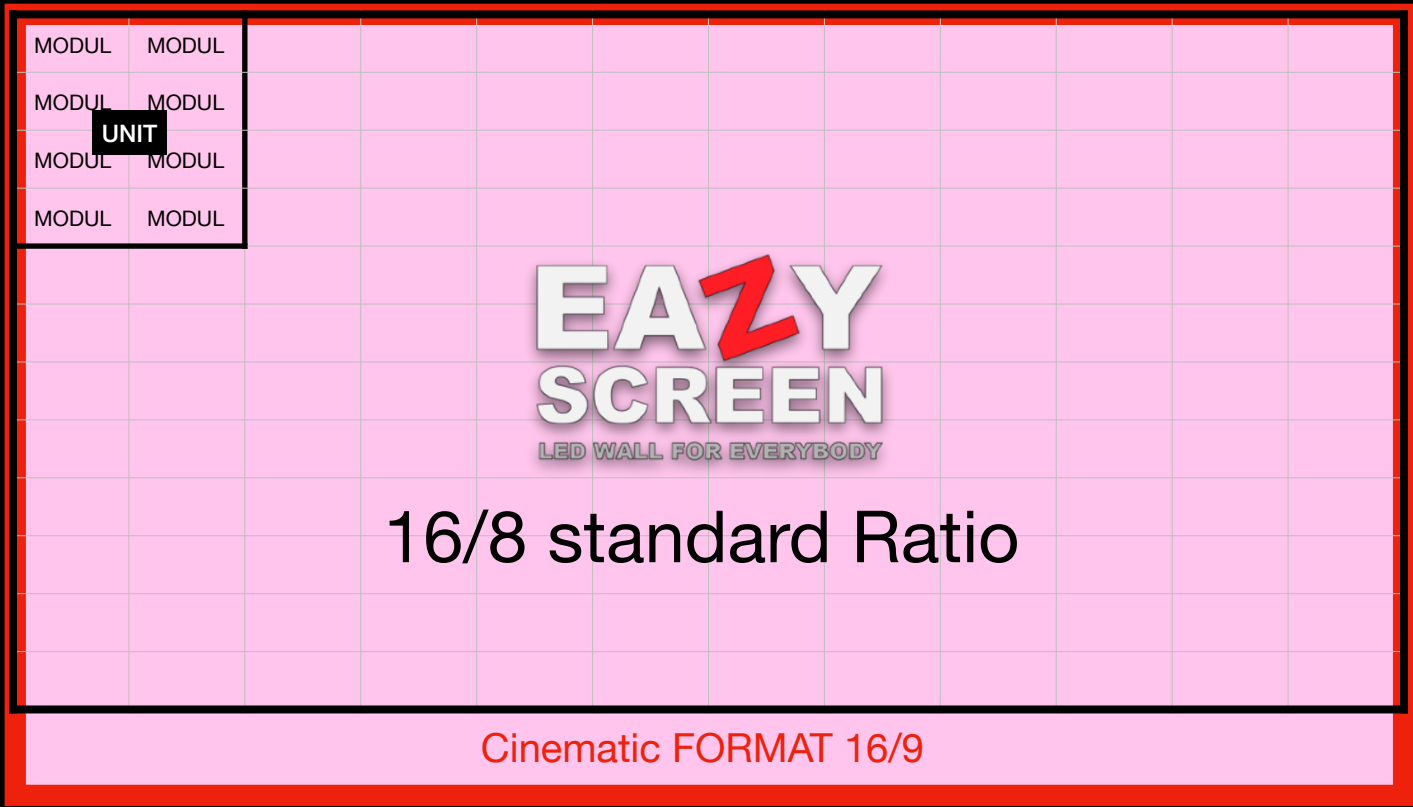

90% match CINEMA-RATIO with LOW-Costs

(Special Edition for Cinematic RATIO aviable, Higher costs)

(Need to do 3 special UNITS with 2 Modules High and 4 Modules With)

PIXEL-RESOLUTION

	16x8 standard Ratio	16x9 special EDITION
P 2.5	1536 x 768	1536 x 896
P 2	1920 x 960	1920 x 1120
P1.8	2112 x 1056	2112 x 1232

FULL HD
FULL HD+


...for more Questions? ask your local EAZY-DEALER!

Cinematic SIZE VARIATIONS

P 2.5

480cm x 256cm
1920 x 1024 pixel
240 modules
28 units standard
+2 units special


2,56m = 4 UNITS

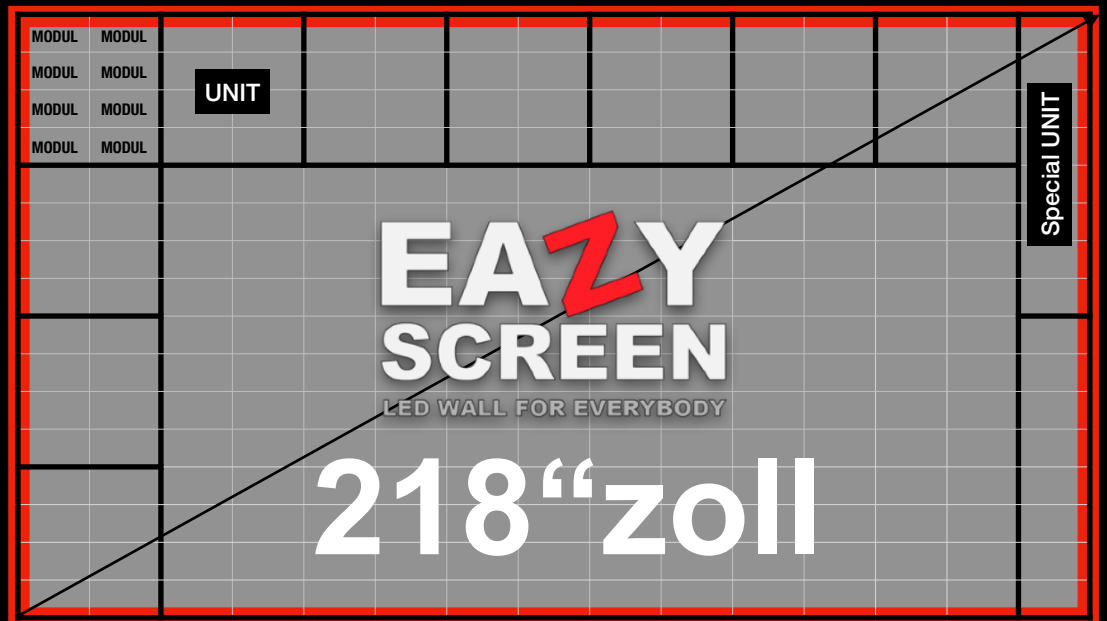

P 2

384cm x 224cm
1920 x 1120 pixel
168 modules
18 units standard
+3 units special


2,24m = 3 UNITS +special UNIT

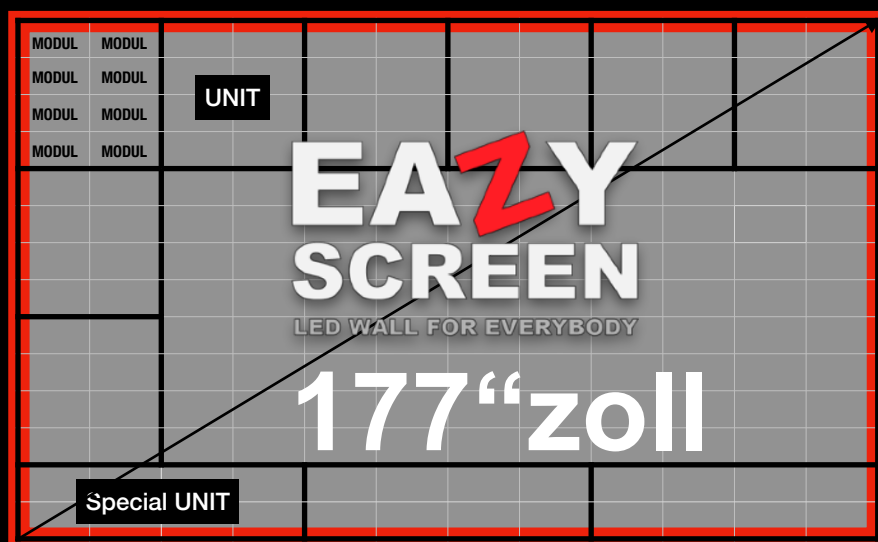

P 1.8

352cm x 192cm
1936 x 1056 pixel
132 modules
15 units standard
+2 units special

1,92m = 3 UNITS

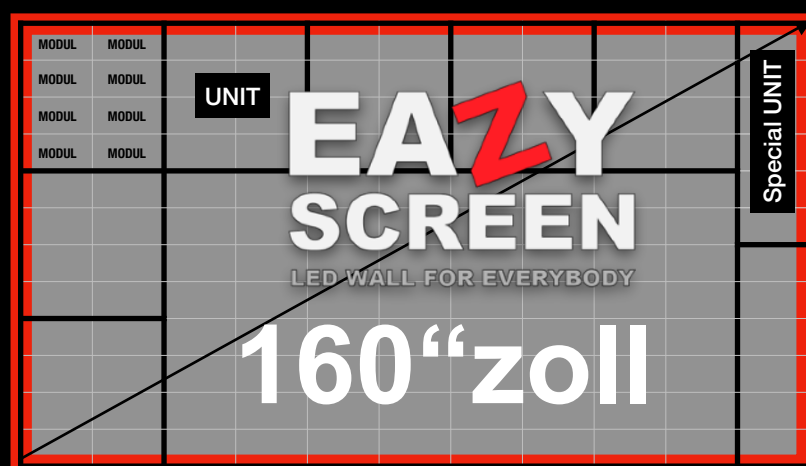

...for more Questions? ask your local EAZY-DEALER!